

**P/N: 818002131**

USS RF V Receptacle



## 技术参数

1.1 频率范围: 0~6GHz

1.2 特性阻抗:  $50\pm 5\Omega$

1.3 绝缘电阻:  $500M\Omega$  Min ( Initial )

1.4 耐压: 200V AC/60s

1.5 内导体接触电阻:  $20m\Omega$  Max

1.6 外导体接触电阻:  $10m\Omega$  Max、

1.7 电压驻波比:

$\leq 1.3$  ( DC~3GHz )




$\leq 1.4$  ( 3~6GHz )

1.8 机械寿命: 30 Cycles


1.9 相对湿度: 95%R.H.Max

2.0 工作温度:  $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$


## 外形尺寸

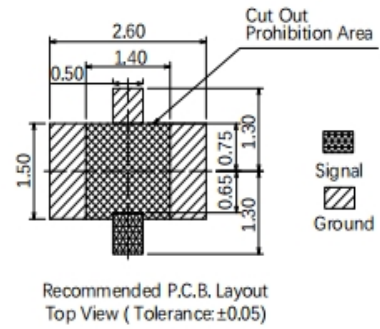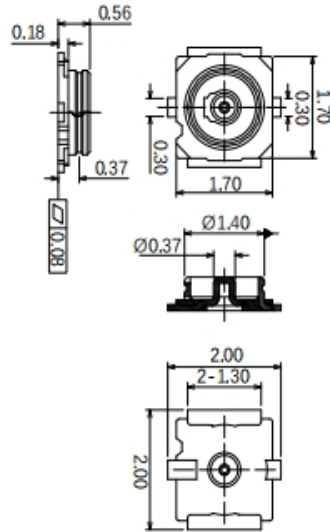

## 印制板焊盘



Recommended Mask, Thickness: 0.1mm  
Top View (Tolerance:  $\pm 0.03$ )

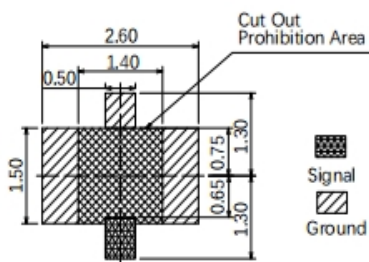

Recommended P.C.B. Layout  
Top View (Tolerance:  $\pm 0.05$ )